


SMART MODULE CONTROLLER

SUN2000-600W-PA0



Higher Yields
Module-level Optimization
Increase System Energy
Yield by 5% to 30%

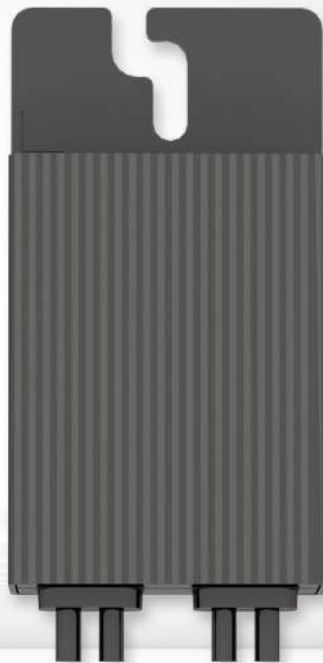

Saferooft
Multiple-protection
technologies always keeps
rooftop safe



Flexible Design
Easier Module Layout
and 30% Higher Installed
Capacity on Average



Smart O&M
Module-level
Visibility and Refined
Management

SUN2000-600W-PA0 **Technical Specification**

Technical Specification		SUN2000-600W-PA0	
Input			
Max. PV module power	720 W		
Absolute max. input voltage	80 V		
MPPT operating voltage range	10–80 V		
Max. input current	16 A		
Max. short-circuit current (Isc)	24 A		
Max. efficiency	99.5%		
Weighted efficiency	99.0%		
Overvoltage category	II		
Output			
Max. output voltage	80 V		
Max. output current	16 A		
Output bypass ¹	Yes		
Output voltage during standby per optimizer	1 V		
Communication			
Communication protocol	MBUS		
Standards Compliance			
Safety	IEC62109-1 (class II safety)		
EMC	IEC61000-6-1,IEC61000-6-2,IEC61000-6-3, IEC61000-6-4, EN 55011:2016/A2:2021 ,EN62920:2017/A1:2021		
RoHS	Yes		
Fire Safety	NEC 2020		
General Specifications			
Dimensions (W x H x D)	73.8 mm x 145 mm x 27.2 mm		
Weight (including cables)	0.65 kg		
Installation part (optional)	Frame mounting bracket / T-shaped bolt ²		
Input connector	Staubli MC4		
Input wire length	0.1 m		
Output connector	Staubli MC4		
Output wire length	(+)2.2 m / (-) 0.1 m		
Ambient temperature / humidity range ³	–40°C to +85°C / 0%-100%		
IP rating	IP68		

PV System Design ⁴	SUN2000-2-6KTL-L1	SUN2000-3-6KTL-LB0 SUN5000-3K/6K-LB0 SUN2000-8K/10K-LC0	SUN2000-3-10KTL-M1 SUN2000-10KTL-BEM1	SUN2000-5-12K-MAPO SUN2000-10K-MAPO-BE SUN5000-8K/12K-MAPO	SUN2000-12-25K-MB0 SUN5000-17/25K-MB0
Min. string length (power optimizers)	4	4	6	6	6
Max. string length (power optimizers)	20	20	35	35	35
Max. DC power per string	6,000 W	6,000 W	10,000 W	12,000 W	12,000 W

*1 Any power optimizer, which is connected to an operating inverter in a PV string, will be bypassed when it fails.

*2 It is for PV module frame/extruded aluminum profile racking system installation.

*3 When the ambient temperature of the optimizer reaches 70 °C to 85 °C, it may shut down due to over-temperature protection . After the temperature decreases, it can automatically resume working without causing any damage.

*4 SUN2000-450W-P2/600W-P, SUN2000-600W-PA0 and MERC-1100/1300W-P can NOT be used in mixture under the same Smart Energy/PV Controller.

Disclaimer: the preceding values are measured by an internal laboratory of Huawei in a specific environment. The actual values may vary with products, software versions, usage conditions, and environmental factors.